



# **DX07 Series**

## **USB Type-C™ Connector**

Connector Training Module

Technology to Inspire Innovation




# JAE DX07 Series

## USB Type-C™ Connector

### Application Examples

- Smartphones
- Tablets
- PCs
- Monitors/TVs
- Digital cameras
- Other consumer devices

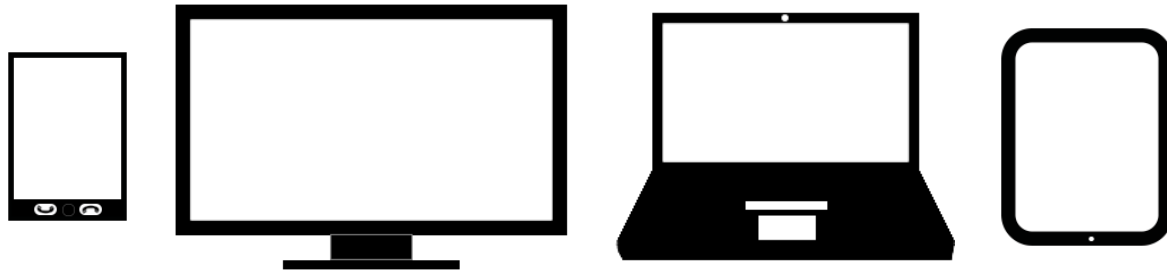

# DX07 Series Overview

The next-generation USB Type-C™ interface has been defined by the USB-IF<sup>(Note)</sup> for connecting current and future consumer and industrial devices such as mobile phones, various PCs, and imaging devices. It features a reversible plug that enables insertion and removal in the right side up, or up side down orientation. It also supports USB 3.1 transmission speeds of up to 10Gbps, and a maximum of 5A of power. JAE's new family of Type-C™ connectors, the DX07 Series, includes plugs, receptacles, and harnesses.




**\*Note\*** - USB Implementers Forum, Inc. is a non-profit corporation founded by the group of companies that developed the Universal Serial Bus specification.


# DX07 Series Features

## *User friendly – Reversible insertion*


- Compatible with Universal Serial Bus (USB) Type-CTM Cable and Connector Specification
- Compatible with SuperSpeed USB 3.1 communication
- Supports a maximum of 5A and 20V of power for charging
  - Compatible with USB Power Delivery
- Reversible plug allows for easy insertion and removal
- Superior EMI / EMC characteristics with multiple ground contact points
- Friction lock included within plug connector
- Rear shell option available for SMT variants

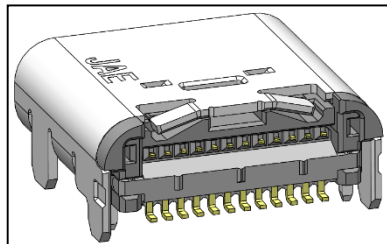

Without rear shell

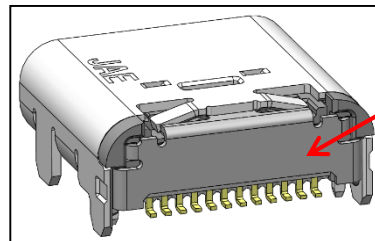



With rear shell

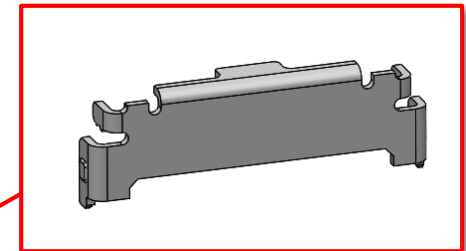


Optional rear shell for  
extra shielding

# General Specifications


<b>No. of Contacts</b>	24
<b>Rated Current</b>	Terminal No. A1, A4, A9, A12, B1, B4, B5, B9, B12 are DC 1.25A (maximum), Others are DC 0.25A
<b>Rated Voltage</b>	AC 20V r.m.s.
<b>Contact Resistance</b>	40mΩ max. (initial)
<b>Dielectric Withstanding Voltage</b>	AC 100V r.m.s. for 1minute
<b>Insulation Resistance</b>	100MΩ min. (initial)
<b>Operating Temperature Range</b>	-30 Deg. C ~ +80 Deg. C
<b>Mating Durability</b>	10,000 cycles

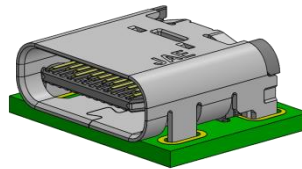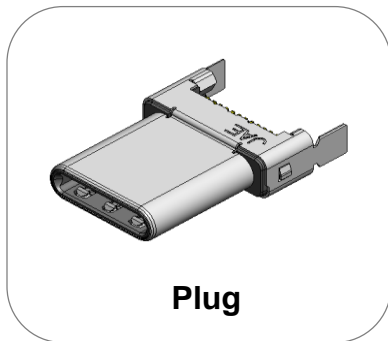


**Receptacle**  
(Dual Row SMT On-Board)

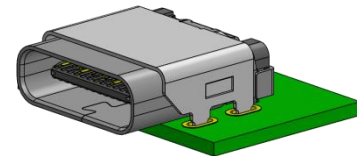

**Receptacle**  
(Hybrid On-Board)

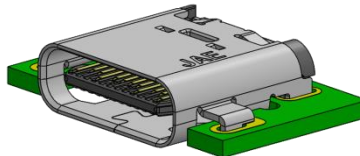

**Receptacle**  
(Dual Row SMT Mid-Mount)

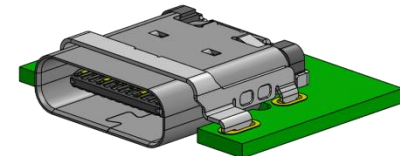


**Receptacle**  
(Hybrid Mid-Mount)

# Basic Dimensions




\*All units in mm

## Plug

p/n: DX07P024MJ1

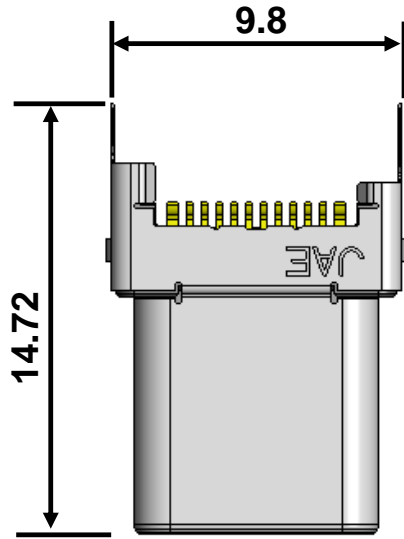

Paddle card  
(not included)

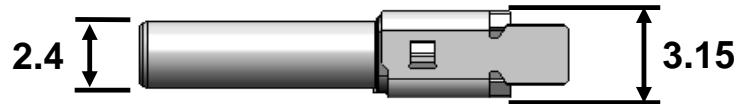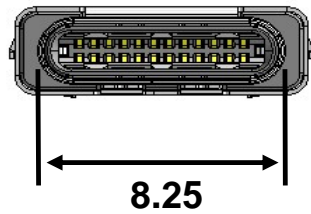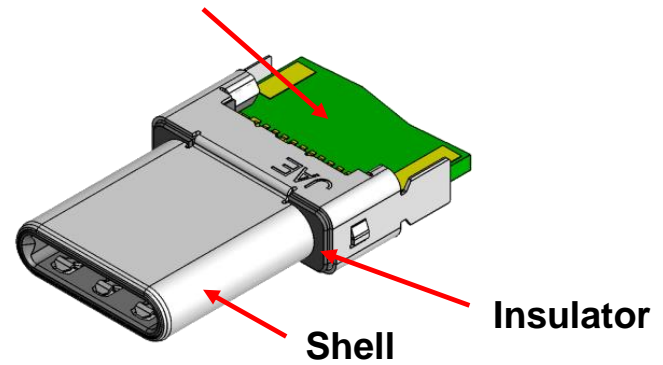






# Basic Dimensions



\*All units in mm

## Receptacle (Dual Row SMT Mid-Mount)

p/n: DX07B024JJ\*

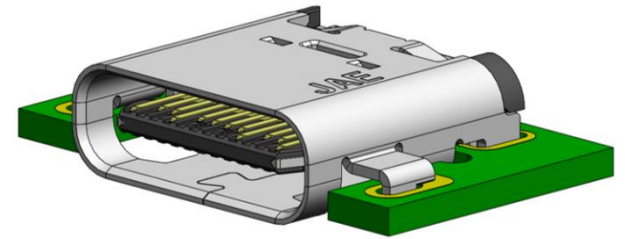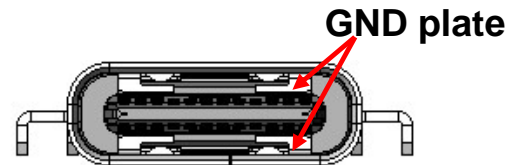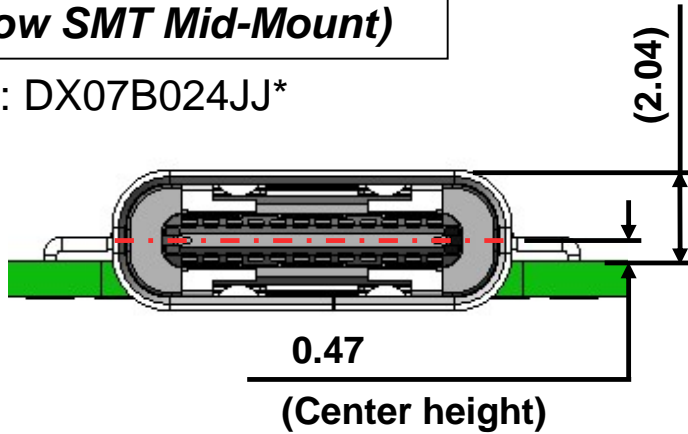

(Dual Row SMT Mid-Mount)


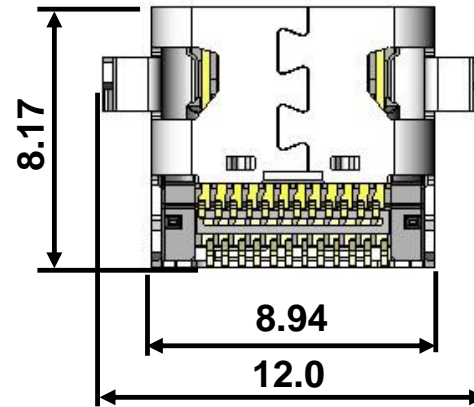
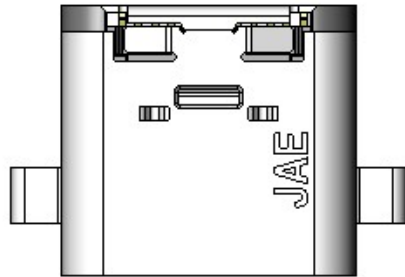




# Basic Dimensions (continued)

\*All units in mm


## Receptacle (Dual Row SMT Mid-Mount)

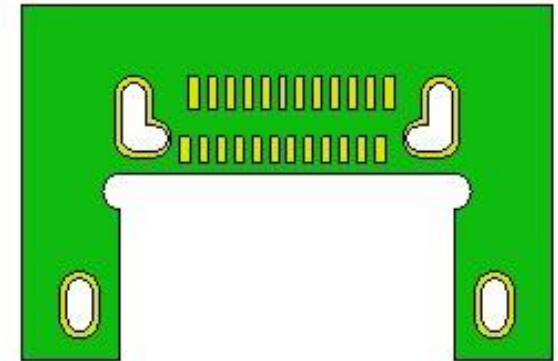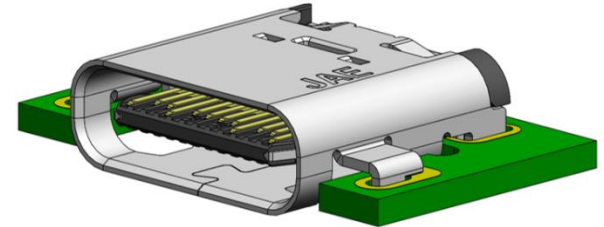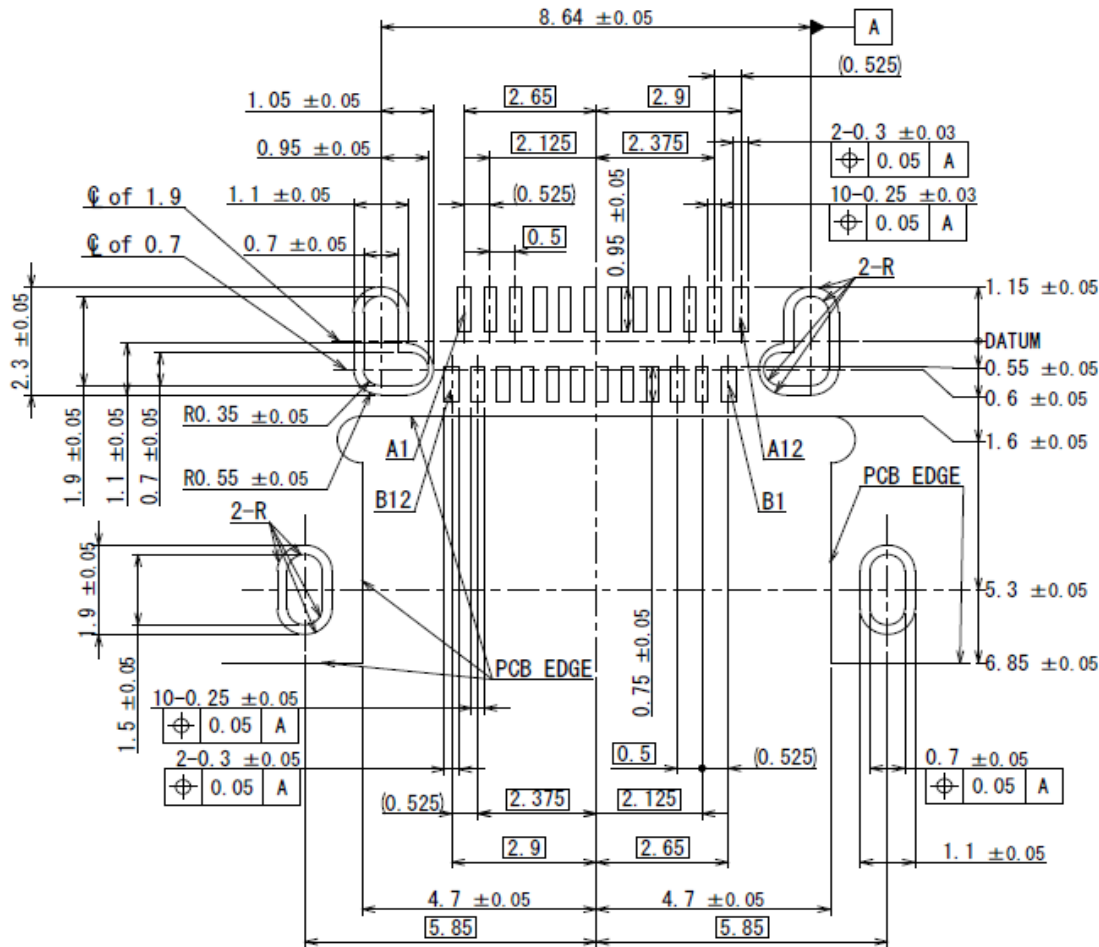

Footprint will be on the Type C™ spec for dual row SMT mid mount.

# Basic Dimensions





\*All units in mm

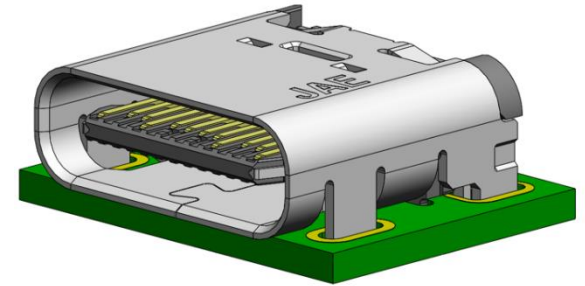

(Dual Row SMT On-board)

**Receptacle**  
*(Dual Row SMT On-board)*


p/n: DX07S024JJ\*

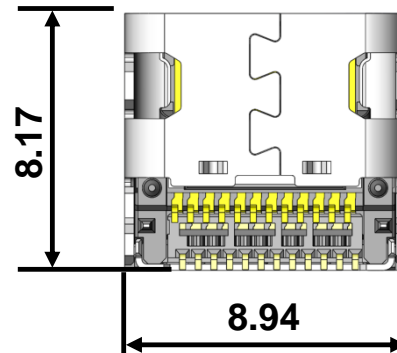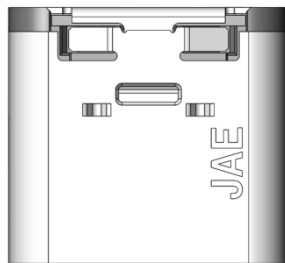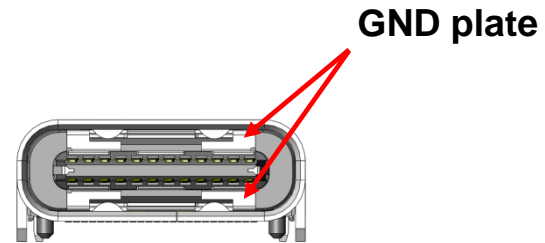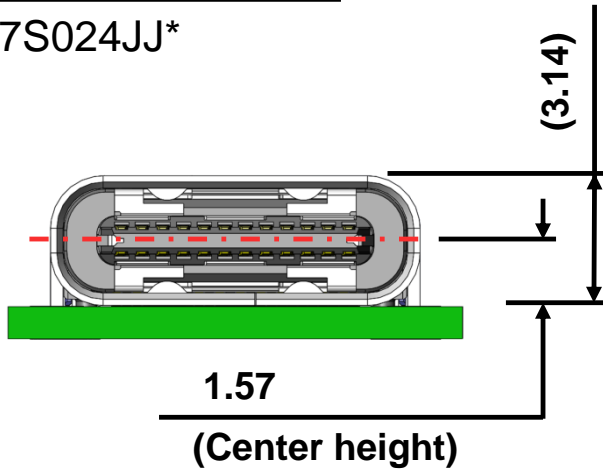



# Basic Dimensions (continued)

\*All units in mm

## Receptacle (Dual Row SMT On-board)

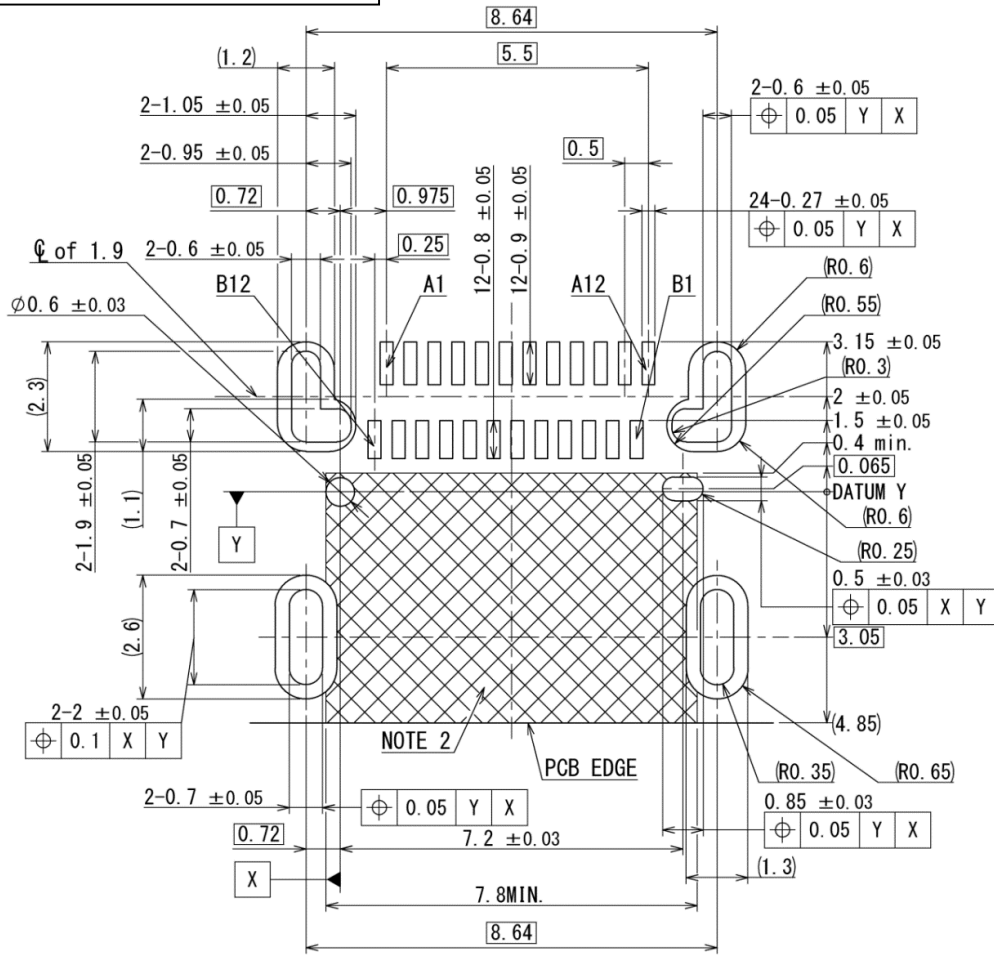

NOTE2. NO PCB ROUTING ALLOWED IN THIS AREA.

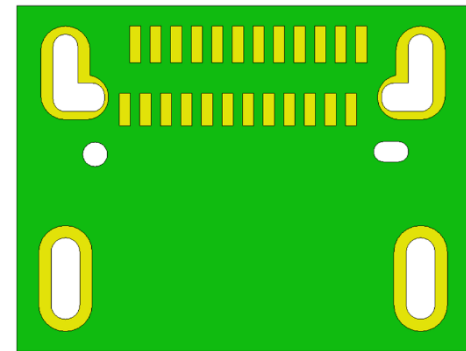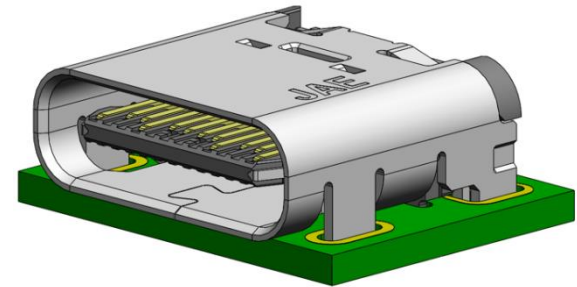






**Not compatible with reference footprint on the Type C™ spec.**

# Basic Dimensions

\*All units in mm

## Receptacle (Hybrid On-board)





p/n: DX07S024XJ1

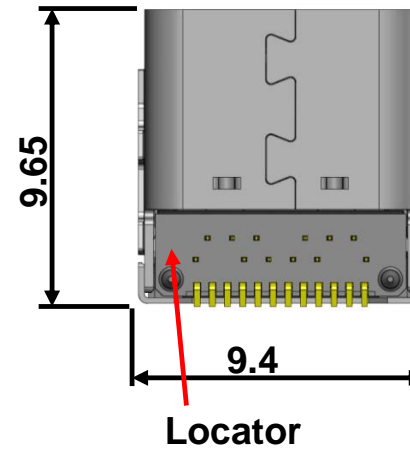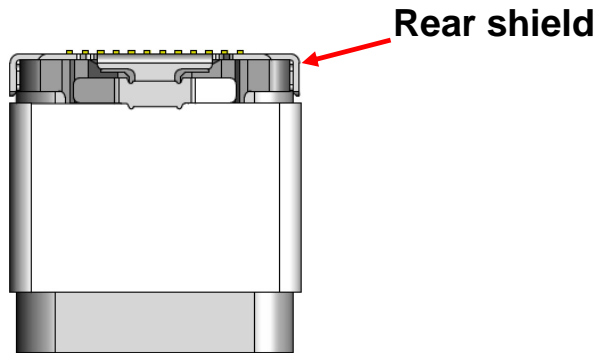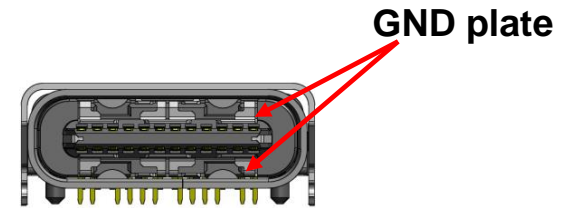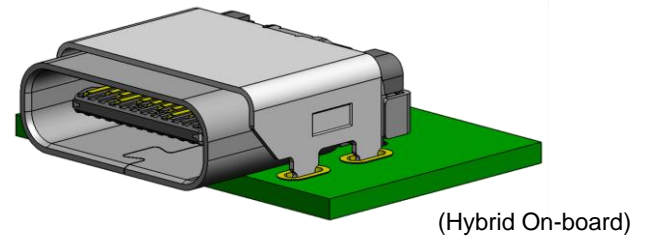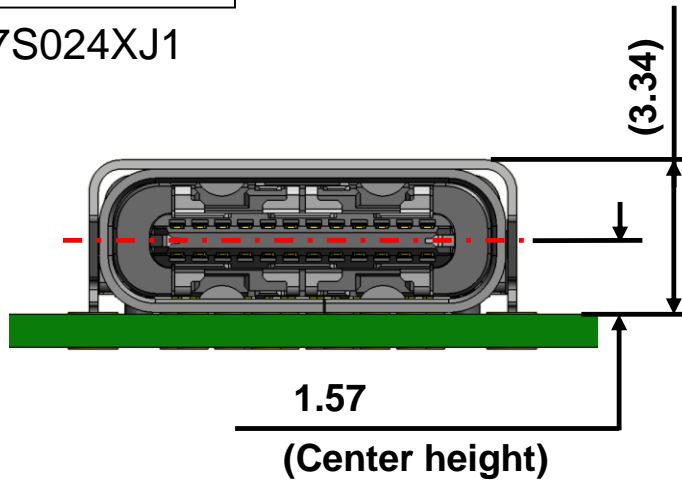

# Basic Dimensions (continued)

\*All units in mm

## Receptacle (Hybrid On-board)

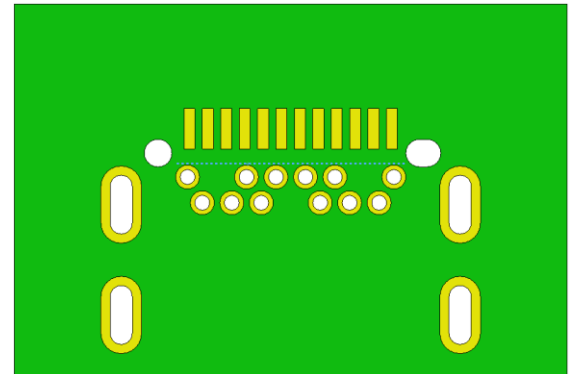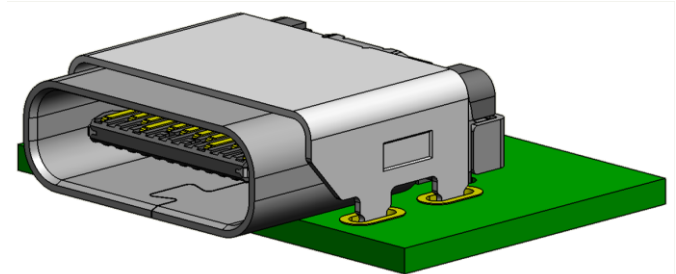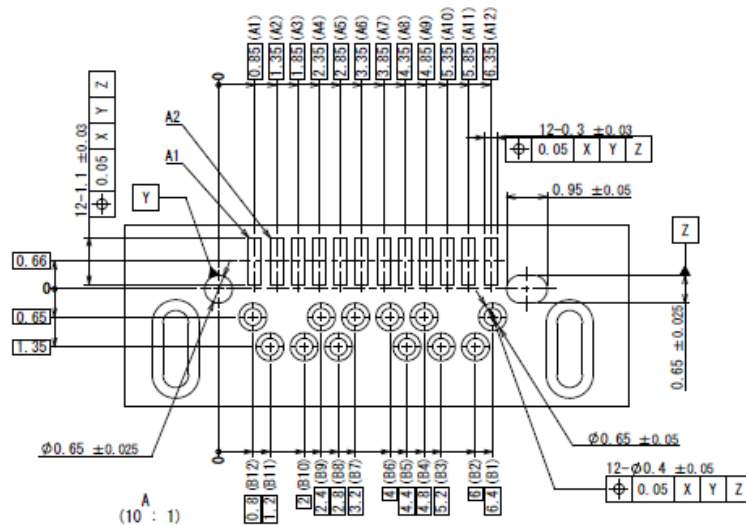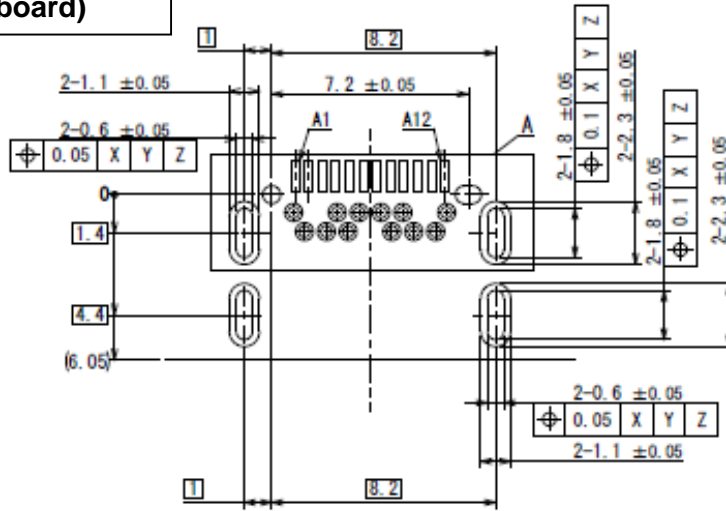






Not compatible with reference footprint on the Type C™ spec.

# Basic Dimensions

\*All units in mm

## Receptacle (Hybrid Mid-Mount)

p/n: DX07B024XJ1

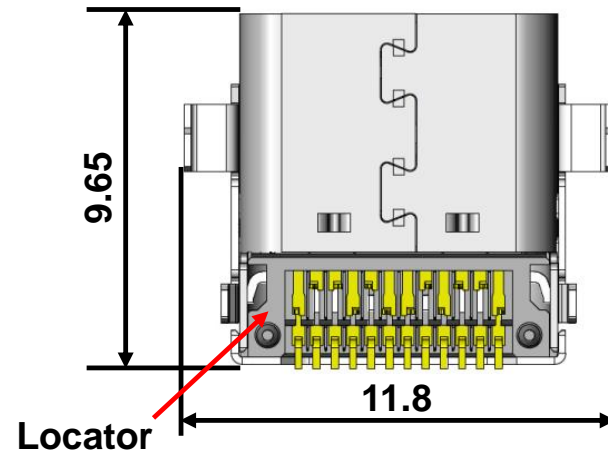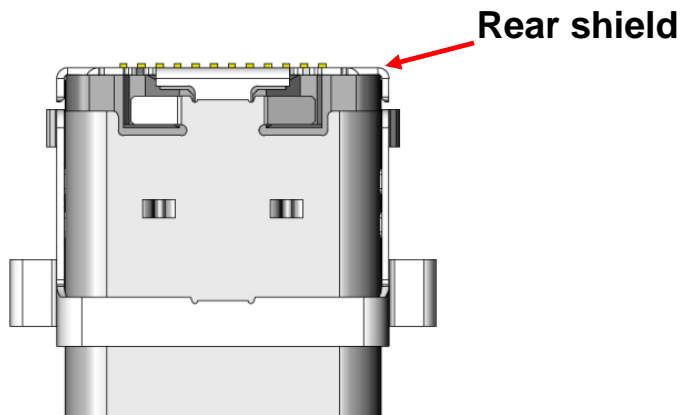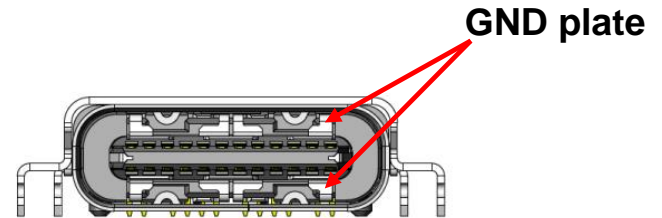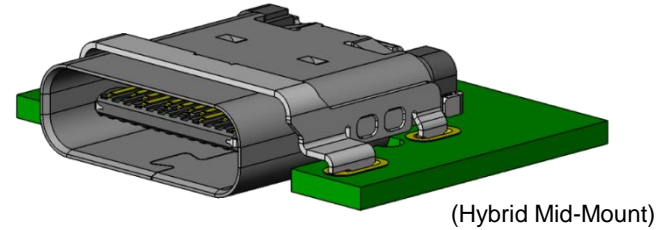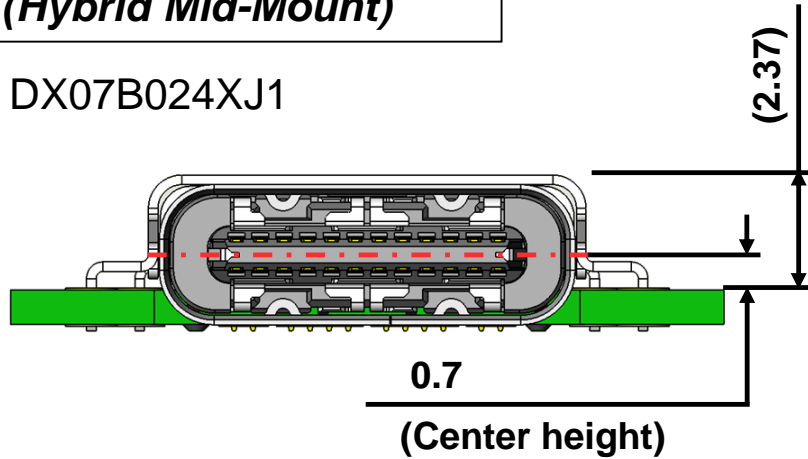



# Materials and Finishes

## Dual Row SMT Receptacle

Component	Material / Finish
Insulators	Synthetic Resin
Rear Shield (optional)	Stainless Steel w/ Nickel Plating
Shell	Stainless Steel w/ Nickel Plating
Ground Plate	Stainless Steel w/ Nickel Plating
Mid Plate	Stainless Steel w/ Nickel Plating
Contacts	Copper Alloy w/ Contact area: Gold Flash plating over Palladium-Nickel over Nickel Solder tails: Gold Flash plating over Nickel


## Hybrid Receptacle

Component	Material / Finish
Insulator	Synthetic Resin
Rear Shield	Stainless Steel w/ Nickel Plating
Bracket	Stainless Steel w/ Nickel Plating
Shell	Stainless Steel w/ Black Nickel Plating
Ground Plate	Stainless Steel w/ Nickel Plating
Mid Plate	Stainless Steel w/ Nickel Plating
Contacts	Copper Alloy w/ Contact area: Gold Flash plating over Palladium-Nickel over Nickel Solder tails: Gold Flash plating over Nickel




# Materials and Finishes (continued)

Plug	
Component	Material / Finish
<b>Contact</b>	Copper Alloy w/ Contact area: Gold Flash plating over Palladium-Nickel over Nickel Solder tails: Gold Flash plating over Nickel
<b>Ground Spring</b>	Stainless Steel w/ Nickel Plating
<b>Friction Lock</b>	Stainless Steel
<b>Shell</b>	Stainless Steel w/ Nickel Plating
<b>Insulator</b>	Heat Resistant Resin / Black
<b>Inner Insulator</b>	Heat Resistant Resin / Black
<b>Insulation Tape</b>	Polyimide
<b>Protection Cap</b>	Heat Resistant Resin / Black

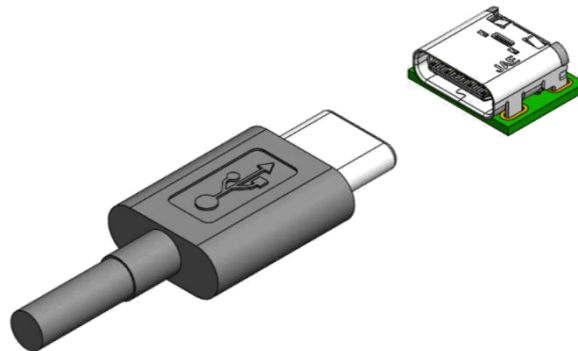

# Ordering Information

Type		Part Number	Rear Shield	SJ Drawing
Plug		DX07P024MJ1R1500	-	<b>SJ115803</b> (Individual Connector)
				<b>SJ115804</b> (Reeled Product)
Receptacles	Mid-mount type	DX07B024JJ1R1500	Yes	<b>SJ115850</b> (Individual Connector)
				<b>SJ115851</b> (Reeled Product)
		DX07B024JJ2R1500	No	<b>SJ115996</b> (Individual Connector)
	<b>SJ115997</b> (Reeled Product)			
	On-board type	DX07B024XJ1R1300	Yes	<b>SJ116121</b> (Individual Connector)
				<b>SJ116122</b> (Reeled Product)
DX07S024JJ2R1300				Yes
		<b>SJ115947</b> (Reeled Product)		
		DX07S024JJ3R1300	No	
<b>SJ115995</b> (Reeled Product)				
DX07S024XJ1R1100	Yes	<b>SJ116123</b> (Individual Connector)		
		<b>SJ116124</b> (Reeled Product)		

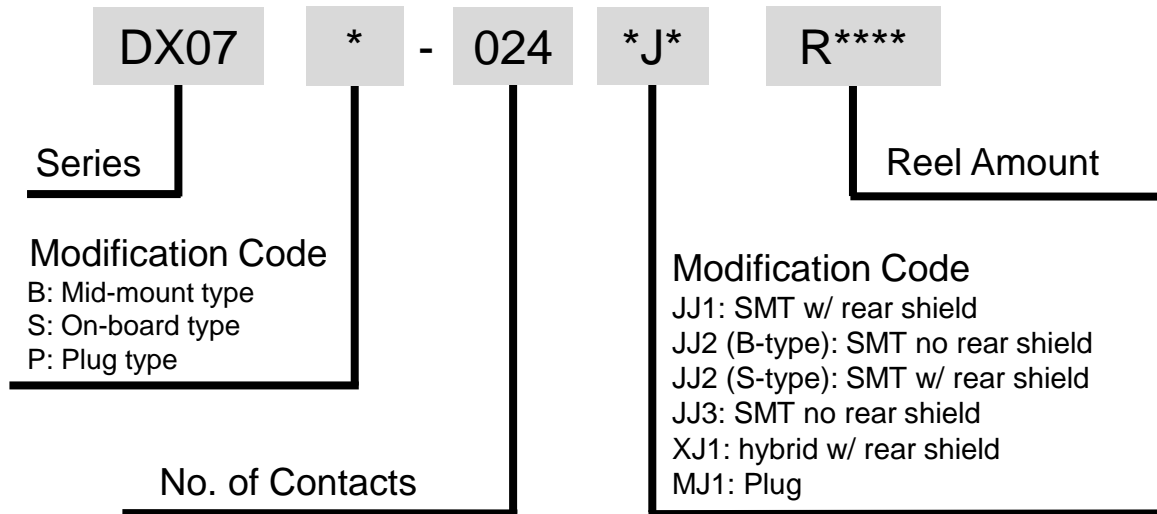

## Summary

- USB 3.1 high speed signaling supported
- Mid-mount and On-board type receptacles available
- User-friendly – Reversible insertion
- Optional rear shell
- Friction lock equipped
- Enhanced EMI performance
- Power delivery supported (3A/5A)



Technology to Inspire Innovation

**JAE**